

Required by / When

The Contractor/Immediately

Consultant Wahib Medanat Consultant Engineers Rep No. QC-12 06

Site Name Al Khansa'a Basic Mixed - Balga **Date** 14 / 09 / 2021

Package Package 1

Derar Saraireh & Sons for Engineering & Contracting Contractor

Tender No. 1/2020/USAID/SKEP/3/1

Descr	iption	of	Non-	
Co	nform	an	ce	

- 1. Window sill bottom edge is toothed and not straight.
- 2. No beads installed at corner for tiling work, no. of electrical outlets is not located right.
- 3. The level of window sill is not at design level to avoid conflict its design level precisely and without created groove at its bottom.
- 4. The sheet waterproofing for septic tank and water tank are exposed for long time.

Corrective Action

- 1. To be replaced.
- 2. Plastic beads should be installed at external corners. Outlets to be re-located.
- 3. The sill should be at its with furniture and corridor cabinets. A groove should be created below.
- 4. Cartonal should be fixed to protect the sheets and backfilling should be executed.

Hassan Shaqbua, Supervision **Quality Control Manager**

Report Prepared by

Contractor's Response

The contractor responsed and rectified 1,3,4. 2 still not rectified.

Notes

Before Photos:





Defects in the sill and installation at lower level





No tiles beads used in the tiling





Unprotected waterproofing sheets for watertank and septic tank

Photos After:






Complied sill at the right level installed

Signature



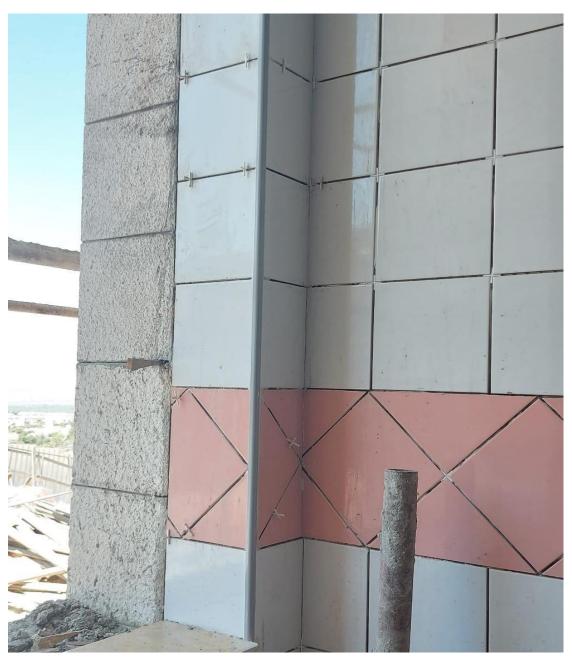

Installing corner beads for tiling works

QC- 120614092021.xlsx

Signature





Protection for waterproofing for watertank and septic tank



Back-filling for watertank and septic tank